

## DVR



Provision-ISR DVRs feature the advanced H.264-H265 video compression format for maximum video quality alongside minimum storage volume. Their Dynamic Hybrid function allows installers to decide how the analog channels will work according to the installation needs, making this installation totally dynamic.



# SH-4050A5N-8L(MM)

## 4CH "4 In 1" + 2CH IP Dynamic Hybrid DVR

Provision-ISR SH-4050A5N-8L(MM) is a high-quality dynamic hybrid digital video recorder obtainable in an elegant mini metal case. This technology allows users to add advanced IP cameras alongside analog ones and enjoy high-quality images and other advanced features available on IP cameras only. The recorder supports Provision-ISR Standard Video Analytics (Pixel Based).

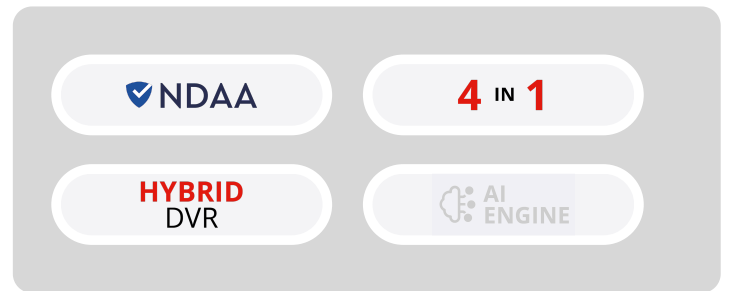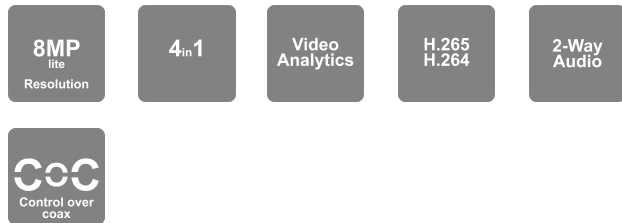

## MAIN FEATURES

- Video: Input: 4~2 Output: VGA: 1024×768/1280×1024/1920×1080 HDMI: 1024×768/1280×1024/1920×1080 CBS (Can be used as spot)
- Recording: HD Analog - 4 Channels AHD/TVI: 5MP Lite Max 10FPS Per Channel Resolution: 1280×1936 (PAL/NTSC) AHD/TVI/CVI: 4MP Lite Max 12/15FPS Per Channel Resolution: 1280×1440 (PAL/NTSC) AHD/TVI/CVI: 1080P Max 12/15FPS Per Channel Resolution: 1920×1080 (PAL/NTSC) (Supported Resolutions: 1080P Lite, 720P in Real-Time) CBS: 960H Max 25/30FPS Per Channel Resolution: 960×576 (PAL) / 960×480 (NTSC) IP - 2 Channels IP: 5MP and lower Max 25/30FPS Per Channel Resolution: 2592×1944 (PAL/NTSC)
- Playback: 4 Channel Simultaneously (Local) 4 Channel Simultaneously (Remote)
- Analytics: For IP Channels: Line Crossing, Sterile Area, Object Monitoring, Camera Tampering and Smart Search. For HD Analog Channels: Line Crossing, Sterile Area and Smart Search.
- Bandwidth: Incoming: 16 Mbps Outgoing: 40Mbps
- Audio: Input: 1 Channel (RCA) + IP Cameras inputs Output: 1 Channel (RCA) + IP Cameras outputs 2 Way audio
- Storage: 1 x SATA (Up to 6TB)
- USB Port: 2 x USB2.0
- Network: RJ-45: 100Mbps
- Alarm: Input: IP Cameras inputs only Output: IP Cameras outputs only
- PTZ / Keyboard: 1 x RS485 Protocol: CoC/Pelco DP/Visca (IP Over ONVIF) Package Contents:
  - Digital Video Recorder
  - USB Mouse
  - DC12V-2A Power Supply



## SPECIFICATIONS

NDAA Compliant	
NDAA Compliant	Yes
General	
Technology	Hybrid DVR
Recording Modes	Schedule, Manual, Motion, Sensor, Analytics, POS
Format	"All in 1" Hybrid (AHD / CVI / TVI / CVBS + IP)
Video Input	
Video Input (Max Analog)	4CH Standard BNC + 2CH IP (Over Network)
Video Input (Max IP)	6CH IP (Over Network) + 0CH Standard BNC
Video Output	
Video Output	HDMI(4K, 1920x1080), VGA (1280x1024), CVBS(Spot)
Dual Output	Mirrored
Audio	
Audio-In	1CH RCA (2.0 Vp-p, 1 kΩ) (+IP Cameras)
Audio-Out	1CH RCA (2.0 Vp-p, 1 kΩ) (+IP Cameras)
Two Way Audio	Yes
Audio Compression	G.711u
Events and Analytics	
SMD Support	No
DDA Analytics (On Analog Channels)	No
For AHD Cameras	Line Crossing, Sterile Area (No Direction Choice)
For IP Cameras	Line Crossing (With Direction Choice), Sterile Area, Object Monitoring, Camera Tampering, Smart Search
Pixel Based Analytics	Yes (Pixel Based)
Main Resolution and FPS	
IP Main Stream	8MP: 20FPS Per Channel, 5MP and lower: 25/30FPS Per Channel

<b>AHD</b>	AHD 8MP lite / 5MP / 4MP: Up to 12/15FPS Per Channel, 5MP Lite: Up to 20FPS Per Channel, 4MP lite / 2MP / 1MP: Up to 25/30FPS Per Channel
<b>TVI</b>	8MP lite / 5MP / 4MP: Up to 12/15FPS Per Channel, 5MP Lite: Up to 20FPS Per Channel, 4MP lite / 2MP / 1MP: Up to 25/30FPS Per Channel
<b>CVI</b>	4MP: Up to 12/15FPS Per Channel, 2MP / 1MP: Up to 25/30FPS Per Channel
<b>CVBS Main Stream</b>	CVBS: 960H: Up to 25/30FPS Per Channel
<b>Master Stream Over Network</b>	8Ch

Network (Substream) Resolution and FPS	
<b>HD Analog</b>	1-25/30FPS@1080P Per Channel
<b>IP Sub Stream</b>	1-25/30FPS@D1 Per Channel
<b>CVBS Sub Stream</b>	1-25/30FPS@D1 Per Channel
<b>Substreams over Network</b>	30 (Outgoing bandwidth limit applies)

Remote view	
<b>Max Channel View</b>	30Ch (Limited to Outgoing Bandwidth Capacity)

Video Compression	
<b>Video Compression</b>	H.265 (HEVC) / H.264

Record	
<b>Recording Mode</b>	Main Stream only

Remote Applications	
<b>User Access</b>	5 Users Online with Professional Authority Management
<b>Mobile App</b>	Provision Cam2 for iOS/Android
<b>PC/Mac Software</b>	Ossia VMS Standard / Enterprise
<b>Plug-in free Web-Browser</b>	Chrome, FireFox, Safari, Edge, Opera. (All Limited to 4Ch Live View / Playback)
<b>Plug-in based Web-Browser</b>	Internet Explorer

Bandwidth	
<b>Incoming</b>	16Mbps

<b>Outgoing</b>	40Mbps
<b>Playback</b>	
<b>Local Playback Channels</b>	4Ch
<b>Remote Playback Channels</b>	6Ch
<b>Search Modes</b>	Time-Slice, Time, Event, File Management, Smart Search
<b>Backup</b>	
<b>USB</b>	2 USB 2.0 Port
<b>Backup Format</b>	AVI/DAT
<b>Alarm</b>	
<b>Alarm-in</b>	IP Cameras only
<b>Alarm-out</b>	IP Cameras only
<b>Alarm Box Support</b>	No
<b>Storage</b>	
<b>HDD Max Capacity</b>	6TB
<b>Total HDD Max Capacity</b>	6TB
<b>Number of HDD</b>	1
<b>E-Sata</b>	No
<b>PTZ</b>	
<b>Connection</b>	RS-485 / CoC / IP over Network
<b>Supported Protocols</b>	Pelco D, Pelco P, Samsung, Visca, ONVIF, CoC
<b>Supported Controls</b>	Pan, Tilt, Zoom, Preset, Cruise, Scan, Iris, Focus
<b>Network</b>	
<b>Ethernet</b>	100 Mbps (RJ-45)
<b>Protocols</b>	TCP/IP, DHCP, DDNS, NTP, SMTP, RTSP, HTTPS, FTP, SNMP, P2P, POS

# SH-4050A5N-8L(MM)

<b>ONVIF</b>	Yes (For IP Channels)
<b>Others</b>	
<b>Dimensions</b>	W255xD220xH43mm
<b>Power Supply</b>	12V/2A
<b>Operation Temperature</b>	0°C ~50°C

## DIMENSIONS

